25.6V 100AH

25.6V 200AH





Super Points: ONE Battery For Multiple Brand Inverters

Long[·]cycle[·]life

Using∱igh-qualityÁthiumÁron∕ahosphateÁatteries,Á theÁcycleÁifeÁsÁmoreÁthan/6000/timesO FÔÁJ€% DOD,ÁandÁanÁseÁsedÁorÁ0-15Ásears



High quality Grade A+ Prismatic LiFePO4 battery Higher capacity, higher current, longer life

Low internal resistance and high current

Low internal resistance of the battery, excellent continuous high current discharge performance

Product advantages



Intelligent BMS battery protection

Built-in intelligent BMS (battery management system), effectively avoiding overcharge, overdischarge, overcurrent, short-circuit, balance and other problems



Intelligent control & monitor with Bluetooth

Good safety performance Extreme safety test, no fire, no explosion, no leakage

Key Features

- \star A GRADE high quality prismatic cells.
- \star High quality smart BMS.
- ★ Maintenance free & Low self discharge & Fast and efficient charging.
- ★ Bluetooth and LCD Display for intelligent control and monitor.


Protection


- \star Over charge detection function
- ★ Over discharge detection function
- \star Over current detection function
- \star Temperature protection function
- \star Short circuit detection function
- ★ Balance function
- ★ Upper computer software monitor

Parameters

Product model	LFPI-25.6V100AH	LFPI-25.6V200AH
Product specification	25.6V 100Ah	25.6V 200Ah
Nominalvoltage	25.6V	25.6V
Nominal capacity	100Ah	200Ah
Cell type	A+ Grade LiFePO4	A+ Grade LiFePO4
Standard charge voltage	29.2V	29.2V
Max charge current	100A	150A
Discharge cut-off voltage	20V	20V
Max discharge current	100A	150A
Parallels function	Support 4 units in series/ 4 units in parallel	
Cycle life	6000 Cycles@1C 90%DOD	
Charge temperature range	-0~60°C	
Discharge temperature range	-20~60°C	
Color	Black	
Dimensions	483*240*170MM	522*240*218 MM
Weight	22kg	40kg
Installation method	Floor	
Energy	2560WH	5120WH
Months Self Discharge	< 3%	
Efficiency of charge	100%@0.2C	
Efficiency of Discharge	96-99%@1C	
Cells	Prismatic	
Case	ABS	
Teminal	M6	
Certificates	ISO,UL,CEI-021,IEC,CE,CB,UN38.3,MSDS	
	Bluetooth & LCD Display	


Charging and Discharge curve



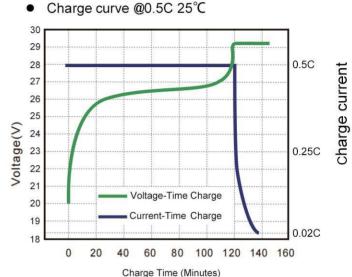



Cycle Life Curve

● Different discharge depth life curves &25℃0.5C



● Different discharge depth life curves &40℃0.5C



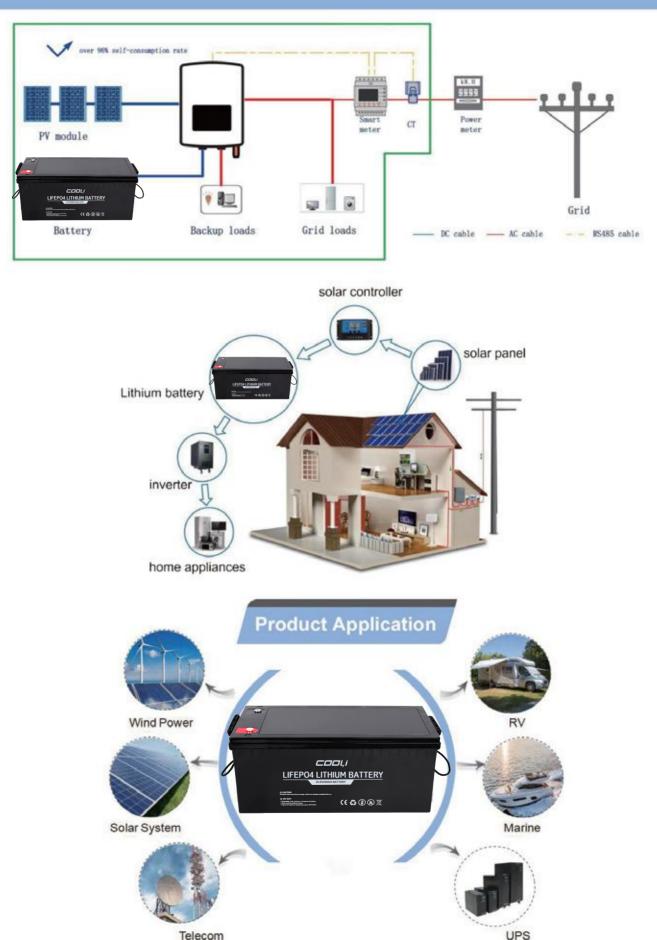

Telecom